



3651 N. Hwy 89 • Chino Valley, AZ 86323  
(928) 636-3100 • www.orfab.com

# PRE-RUNNER TIRE CARRIER INSTALLATION INSTRUCTIONS ALL PICKUPS **KIT # 86300**

**⚠ WARNING**  
DO NOT install the tire carrier if the wheel offset is greater than 8" or the "T" handle does not thread into the tire carrier at least 1".

**⚠ WARNING**  
Always wear eye protection when operating power tools.


**⚠ WARNING**  
Use extreme caution when working near the fuel lines and the fuel tank. A spark could cause an explosion or fire resulting in serious personal injury and property damage.

## Before starting installation

**⚠ NOTE**  
Kit parts are prefaced by the word **kit** and appear in **bold print**.

1. Carefully read all warnings and instructions completely before beginning.
2. Verify all parts have been received in this kit by checking the parts list at the end of this document.
3. **Only install this kit on the vehicle for which it is specified.** If anytime during the installation you encounter something different from what is outlined in the instructions, call technical support at: (928) 636-3100

**⚠ NOTE**  
This tire carrier will accommodate wheels with an offset of about 8" or less as shown. Before installing the tire carrier, measure the wheel offset to determine if the tire carrier will accommodate the wheel.

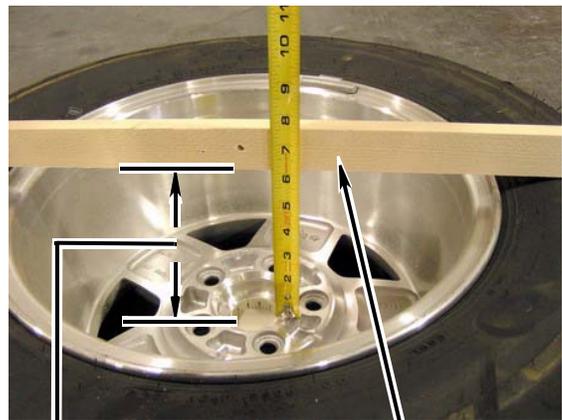

Measure Here

Straightedge

# Install kit

## ⚠ NOTE

The kit **front leg** can be positioned as needed to best fit the application.

1. Slide kit **front leg** onto kit **tire carrier**.



2. Secure kit **front leg** to kit **tire carrier** with kit **bolt** (3/8" x 1") and kit **washer** (3/8" USS).
3. Install kit **lock bar** on kit **tire carrier** with kit **bolts** (5/16" x 1") and kit **nuts** (5/16" serrated flange).

## ⚠ NOTE

The hole in the kit **lock bar** accommodates a pad lock that will prevent tire theft.

4. Set kit **tire carrier** in bed to determine installed position .



## ⚠ NOTE


Make sure the tire will not interfere with the tailgate when it is closed.

5. Using holes in plates of kit **tire carrier** as a template, mark bed.

## ⚠ CAUTION

Check under truck bed to make sure nothing will interfere with drilling or installation of mounting hardware. Check for frame crossmembers, fuel tank, fuel hoses, electrical wires, etc.

6. Drill 3/8" holes in bed where marked.
7. Secure kit **tire carrier** to bed with kit **bolts** (3/8" x 1 1/2"), kit **washers** (3/8" USS), kit **bushings** (shock), and kit **nuts** (3/8" nylock).

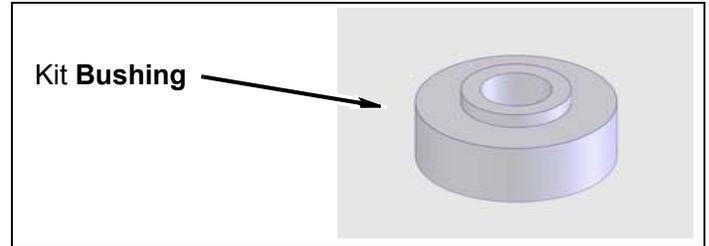


## ⚠ NOTE

The kit bushings are to be used to fill the gap between the mounting bracket and the valley on the ridge of the bed. The bushing is not required if the mounting location is on top of the ridge in the bed.

# Install spare tire

1. Set spare tire on kit **tire carrier**.
2. Set kit **spacer** (Urethane Disc) and kit **disc** (tire retainer) on wheel.

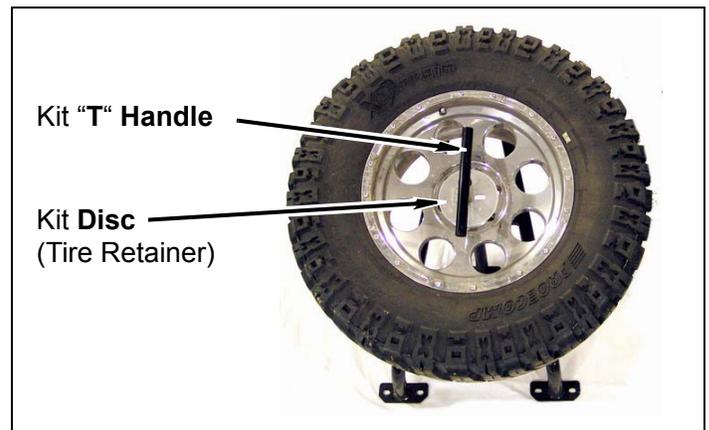

3. Thread kit **"T" handle** into kit **tire carrier** until it contacts kit **disc** (tire retainer). Rotate kit **"T" handle** at least an additional two turns.
4. Install lock (not provided in kit) if applicable.

# Parts list

<u>Qty.</u>	<u>Description</u>
2	<b>Bolt, 5/16" x 1"</b>
1	<b>Bolt, 3/8" x 1"</b>
6	<b>Bolt, 3/8" x 1 1/2"</b>
6	<b>Bushing, shock</b>
1	<b>Disc, tire retainer</b>
1	<b>Front leg</b>
1	<b>Lock bar</b>
2	<b>Nut, 5/16" serrated flange</b>
6	<b>Nut, 3/8" Nylock</b>
1	<b>Spacer, Urethane Disc</b>
1	<b>"T" Handle</b>
1	<b>Tire carrier</b>
12	<b>Washer, 3/8" USS</b>

## ⚠ NOTE

Depending on the vehicle configuration and mounting location, some parts may not be used.

